


スパイラルチューブ

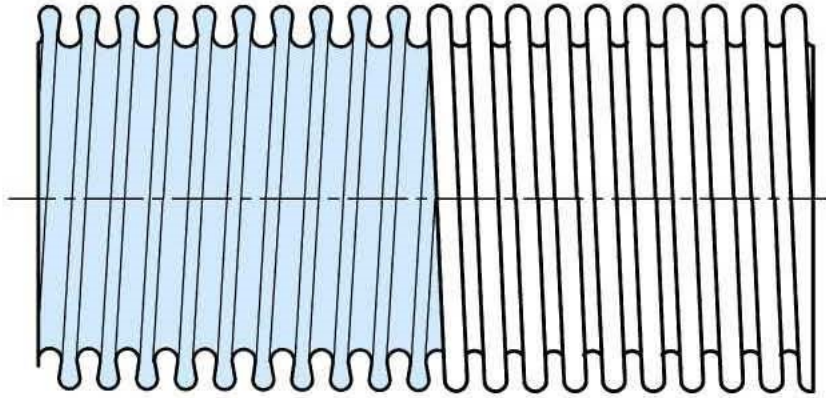

標準材質

- SUS304
- SUS316L

■寸法・性能表

呼径 (A)	種類	寸法 (mm)			S定尺 (m)	曲げ半径 (mm)		最高使用圧力 (MPa)	
		内径	外径	ピッチ		板厚	固定		繰返し
8	UC	7.2	11.4	2.0	0.2	5.0	30	130	7.8
	C	7.2	11.4	2.5					
	S	7.6	11.0	3.1					
10	UC	9.8	15.6	2.4	0.25	5.0	40	135	9.7
	C	9.9	15.6	2.6					
	S	10.0	15.0	3.0					
15	UC	12.3	18.6	2.7	0.25	5.0	50	140	6.5
	C	12.7	18.5	2.9					
	S	13.2	18.5	3.4					
20	UC	18.9	26.0	3.3	0.3	5.0	60	200	6.1
	C	19.0	25.8	3.5					
	S	19.2	25.5	4.1					
25	UC	24.9	33.2	3.5	0.3	5.0	70	230	3.2
	C	25.0	33.0	3.7					
	S	25.0	32.6	4.4					
32	C	32.0	41.4	4.3	0.3	5.0	80	255	4.2
	S	32.3	40.5	5.0					
40	C	38.2	48.5	5.1	0.35	5.0	90	355	3.5
	S	38.5	47.0	6.0					
50	C	51.0	62.1	5.5	0.35	5.0	110	410	1.7
	S	51.5	61.5	6.5					
65	C	62.9	77.9	6.6	0.4	5.0	140	420	1.6
	S	63.5	76.5	7.8					

※上記記載の曲げ半径、最高使用圧力の数値は、SUS304・スタンダードピッチ・1W/Bを常温使用した際のものであります。